
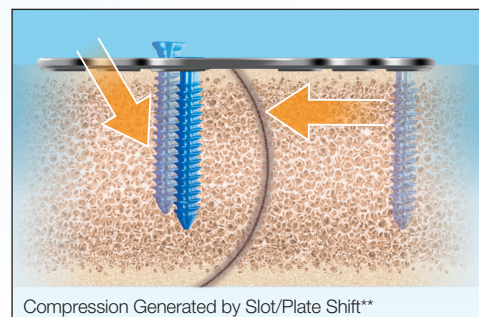


CoLink® XP Plating

Tarsalis Plates

DYNAMIC, TRANSVERSE COMPRESSION

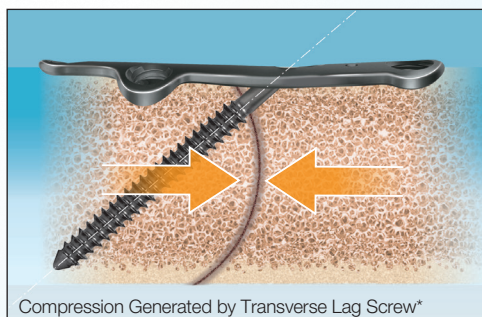

Low Profile, Anatomic Design, Type II Anodized

Mechanical Compression Designed to Stimulate the Fusion Process



A GLOBAL EXTREMITY COMPANY

CoLink® Tarsalis Plates

COLINK® XP PLATING SYSTEM



The CoLink® XP Lapidus and Y Plates use Transverse, Cross-joint design to provide mechanical compression across the fusion site and to stimulate the fusion process. CoLink's Universal Plates create compression via Tapered Compression Slot.

Dynamic, Transverse Compression

Compression Generated by Transverse Lag Screw*
Example: CoLink XP Lapidus



Tapered Compression Slot Compression

Compression Generated by Slot/Plate Shift**
Example: CoLink XP Universal Plate



CoLink® Lapidus Plates

- P40 ST145... Lapidus Plate XP, Std., Right
- P40 ST245... Lapidus Plate XP, Std., Left
- P40 ST155... Lapidus Plate XP,+1 mm, Right
- P40 ST255... Lapidus Plate XP,+1 mm, Left
- P40 ST165... Lapidus Plate XP,+2 mm, Right
- P40 ST265... Lapidus Plate XP,+2 mm, Left



CoLink® Y Plate

P40 ST055... Y-Plate XP, 5-Hole _____ YP XP



CoLink® Universal Plates

- P40 ST012... Universal Plate, 2-hole
- P40 ST013... Universal Plate, 3-hole
- P40 ST014... Universal Plate, 4-hole
- P40 ST015... Universal Plate, 5-hole
- P40 ST016... Universal Plate, 6-hole

P04 S0001.....CoLink® Disposable Sterile Instruments
for 3.0/3.5 Screws; Drills, Olive Wires, Guide Pins



CoLink® Plate Screw Non-Locking

CATALOG NO	DIA x LENGTH, STYLE
V30 ST208 ...	3.0 x 8mm, Non-Locking
V30 ST210 ...	3.0 x 10mm, Non-Locking
V30 ST212 ...	3.0 x 12mm, Non-Locking
V30 ST214 ...	3.0 x 14mm, Non-Locking
V30 ST216 ...	3.0 x 16mm, Non-Locking
V30 ST218 ...	3.0 x 18mm, Non-Locking
V30 ST220 ...	3.0 x 20mm, Non-Locking
V30 ST222 ...	3.0 x 22mm, Non-Locking
V30 ST224 ...	3.0 x 24mm, Non-Locking
V30 ST226 ...	3.0 x 26mm, Non-Locking
V30 ST228 ...	3.0 x 28mm, Non-Locking
V30 ST230 ...	3.0 x 30mm, Non-Locking

V35 ST208 ...	3.5 x 8mm, Non-Locking
V35 ST210 ...	3.5 x 10mm, Non-Locking
V35 ST212 ...	3.5 x 12mm, Non-Locking
V35 ST214 ...	3.5 x 14mm, Non-Locking
V35 ST216 ...	3.5 x 16mm, Non-Locking
V35 ST218 ...	3.5 x 18mm, Non-Locking
V35 ST220 ...	3.5 x 20mm, Non-Locking
V35 ST222 ...	3.5 x 22mm, Non-Locking
V35 ST224 ...	3.5 x 24mm, Non-Locking
V35 ST226 ...	3.5 x 26mm, Non-Locking
V35 ST228 ...	3.5 x 28mm, Non-Locking
V35 ST230 ...	3.5 x 30mm, Non-Locking
V35 ST232 ...	3.5 x 32mm, Non-Locking
V35 ST234 ...	3.5 x 34mm, Non-Locking
V35 ST236 ...	3.5 x 36mm, Non-Locking
V35 ST238 ...	3.5 x 38mm, Non-Locking
V35 ST240 ...	3.5 x 40mm, Non-Locking

CoLink® Plate Screw Locking

CATALOG NO	DIA x LENGTH, STYLE
V30 ST308 ...	3.0 x 8mm, Locking
V30 ST310 ...	3.0 x 10mm, Locking
V30 ST312 ...	3.0 x 12mm, Locking
V30 ST314 ...	3.0 x 14mm, Locking
V30 ST316 ...	3.0 x 16mm, Locking
V30 ST318 ...	3.0 x 18mm, Locking
V30 ST320 ...	3.0 x 20mm, Locking
V30 ST322 ...	3.0 x 22mm, Locking
V30 ST324 ...	3.0 x 24mm, Locking
V30 ST326 ...	3.0 x 26mm, Locking
V30 ST328 ...	3.0 x 28mm, Locking
V30 ST330 ...	3.0 x 30mm, Locking

V35 ST308 ...	3.5 x 8mm, Locking
V35 ST310 ...	3.5 x 10mm, Locking
V35 ST312 ...	3.5 x 12mm, Locking
V35 ST314 ...	3.5 x 14mm, Locking
V35 ST316 ...	3.5 x 16mm, Locking
V35 ST318 ...	3.5 x 18mm, Locking
V35 ST320 ...	3.5 x 20mm, Locking
V35 ST322 ...	3.5 x 22mm, Locking
V35 ST324 ...	3.5 x 24mm, Locking
V35 ST326 ...	3.5 x 26mm, Locking
V35 ST328 ...	3.5 x 28mm, Locking
V35 ST330 ...	3.5 x 30mm, Locking
V35 ST332 ...	3.5 x 32mm, Locking
V35 ST334 ...	3.5 x 34mm, Locking
V35 ST336 ...	3.5 x 36mm, Locking
V35 ST338 ...	3.5 x 38mm, Locking
V35 ST340 ...	3.5 x 40mm, Locking

CoLink® Transverse Screw

CATALOG NO	DIA x LENGTH, STYLE
V30 ST418.....	3.0 x 18mm, Transverse
V30 ST420.....	3.0 x 20mm, Transverse
V30 ST422.....	3.0 x 22mm, Transverse
V30 ST424.....	3.0 x 24mm, Transverse
V30 ST426.....	3.0 x 26mm, Transverse
V30 ST428.....	3.0 x 28mm, Transverse

CoLink® Transverse Screw cont.

CATALOG NO	DIA x LENGTH, STYLE
V30 ST430.....	3.0 x 30mm, Transverse
V30 ST432.....	3.0 x 32mm, Transverse
V30 ST434.....	3.0 x 34mm, Transverse
V30 ST436.....	3.0 x 36mm, Transverse
V30 ST438.....	3.0 x 38mm, Transverse
V30 ST440.....	3.0 x 40mm, Transverse

Sterile Plates - delivered in boxes

Each label indicates specific Plate style and size.




Sterile Screws Tube ID Legend

COLOR CODE:
SCREW STYLE / DIAMETER
Transverse = ●
3.0 Locking / Non-locking = ●
3.5 Locking / Non-locking = ●



Example Screw code designates: Locking 3.0 x 28mm

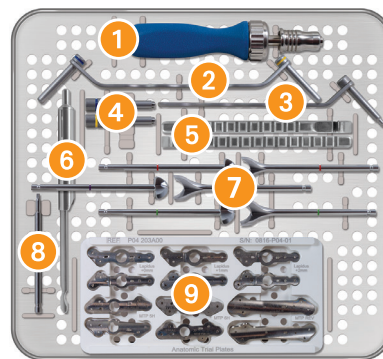

INSTRUMENT TRAY

- 1 Driver Handle
- 2 Color Coded Non-locking Drill Guides
- 3 Transverse Drill Guides
- 4 Color Coded Locking Drill Guides
- 5 Plate Benders
- 6 Depth Gauge
- 7 Cup & Cone Reamers
- 8 T8 Driver
- 9 Plate Trials

PATENT PENDING



A GLOBAL EXTREMITY COMPANY

Corporate Headquarters

In2Bones Global, Inc. • Memphis, TN • USA
844. 602. 6637 • Info@i2b-USA.com

International Office

In2Bones SAS • Lyon • France
+33 (0)4 72 29 26 26

FOLLOW US...



All content contained herein is furnished for informational purposes only. In2Bones does not recommend a particular surgical product or procedure suitable for all patients. Each surgeon must evaluate the appropriateness of a device and corresponding techniques based on medical training, clinical judgment and surgical experience. The proper surgical technique and/or procedure are the responsibility of the medical professional. Indications, contraindications, warnings, and precautions are listed in implant packaging insert and should be reviewed carefully by the physician and operating room personnel prior to any proposed procedure. • CoLink, the In2Bones name and logo are trademarks of In2Bones or its affiliates. In2Bones USA Memphis TN, 381219 USA / In2Bones SAS, 69130 Ecully - FRANCE - © 2018 In2Bones USA, Memphis, TN - All rights reserved - TAR0718 Rev. C, 10 18